



UV Ozone Treatment For Kitchen Exhaust

UV OZONE CHAMBER



Ozone is produced by UV lamps without the Titanium Dioxide coating that attenuates frequencies lower than 200 nanometers. At the 180 nm line, it breaks oxygen apart to form 2 unstable O which in turn fuse with another O₂ to form O₃.

Ozone is a powerful oxidant and extremely effective germicidal agent which destroys organic molecules in the air as well as grease and oil from kitchen exhausts. It has a very short lifespan and in ambient temperatures, it will last 20-30 minutes before it returns to normal oxygen O₂.


UV ozone is also a scientific breakthrough in odour and grease control, the most effective method known today for eliminating unpleasant odours, grease and oil mist in processing areas.

However in cases where a lot of smoke is generated during the cooking process such as char-grilling, the use of an industrial air cleaner or electrostatic precipitator is recommended.


COS units should be installed as near to the cooking hoods as possible, or as far as possible from the discharge outlet, so as to give the longest possible contact time with the cooking exhaust. For optimum performance, the contact time for air treatment in the duct should be approximately 0.1 to 0.2 seconds or longer if possible. Charcoal filters may be installed at the last stage to mop up residue ozone

How UV Ozone Lamp Works

First Stage : The high intensity UV irradiance oxidizes the oil mist and grease, converting them into vapour and other manageable substances

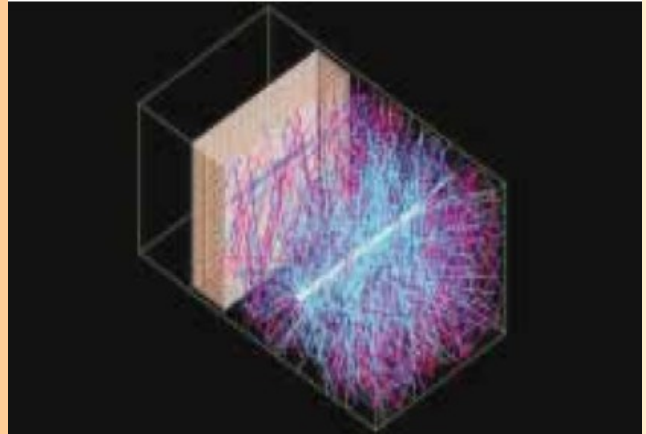


Second Stage: The UV lamp produces Ozone O₃. This is a very powerful oxidizing agent. It oxidizes the organic compounds and acts as a deodorizing agent and is effective for odour control. It also sterilizes the air.

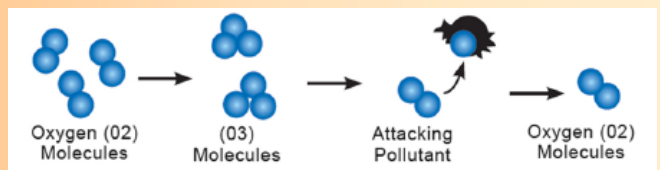

Ozone is a suicidal molecule; it looks for a contaminant to attack, oxidizing it and destroying itself in the process

Units are designed for easy installation to existing or new exhaust ducts. The ballast housing and other components are kept out of the air stream. Lamps can be easily replaced via the unit's housing. Multiple units can be connected and linked to a separate control unit for interlocking operations with the exhaust fan. The control unit is an optional item.

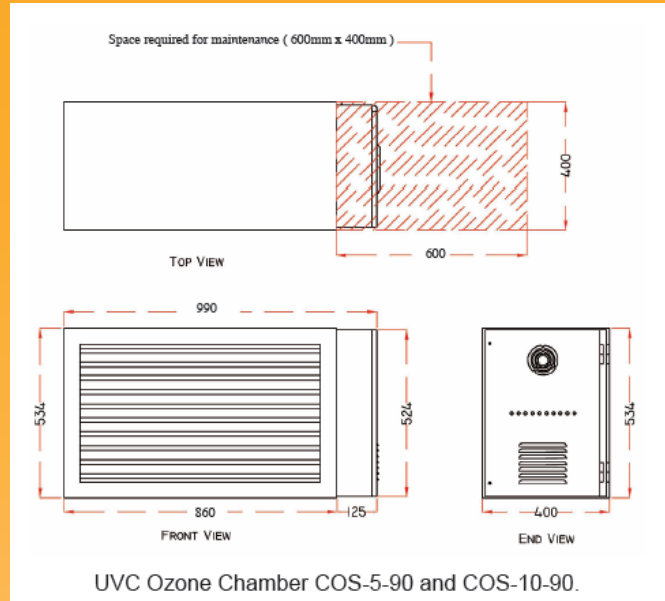

| Model No: | Voltage | Current | Watts per Lamp | Lamp's Length | No of Lamps | Lamp Life | Weight of Unit | Capacity (CMH)* |
|------------------|---------|---------|----------------|---------------|-------------|------------|----------------|-----------------|
| COS-5-90 | 230VAC | 3A. | 75 | 846mm | 5 | 9000 hours | 32kg | 5000-7500 |
| COS-10-90 | 230VAC | 6A | 75 | 846mm | 10 | 9000 hours | 37kg | 7,500-15,000 |

Housing Material: Stainless Steel
 Dimension (W x H x D) : 990 x534 x400mm

* Air Handling Capacity depends on the severity of odour & oil mist and the type & intensity of cooking involved
 For heavier cooking application, use the lower capacity and for lighter cooking, use up to maximum capacity

Multiple Units may be required for higher air volume of the kitchen exhaust fan and for higher cooking intensity

Applications

- Kitchen Exhausts
- Sewage Ventilation
- Garbage Rooms
- Old Rooms
- General Odour Control

OPTIONAL ITEM

DUO Interlocking Control Panel CP-FDC-230




As the COS units produce intense a UV radiation and large amount of ozone, its operation should be interlocked with the exhaust fan for safety reasons.

The COS Interlocking Unit is available as an option. The interlocking signal from the kitchen exhaust fan control panel shall be 230VAC, max 2A. That is, the kitchen exhaust fan control panel sends the 230VAC supply to activate the COS Interlocking Unit, thereby activating the COS units

Dimensions of CP-FDC-230 : 250 x 210 x 151 mm

UVi-Aire

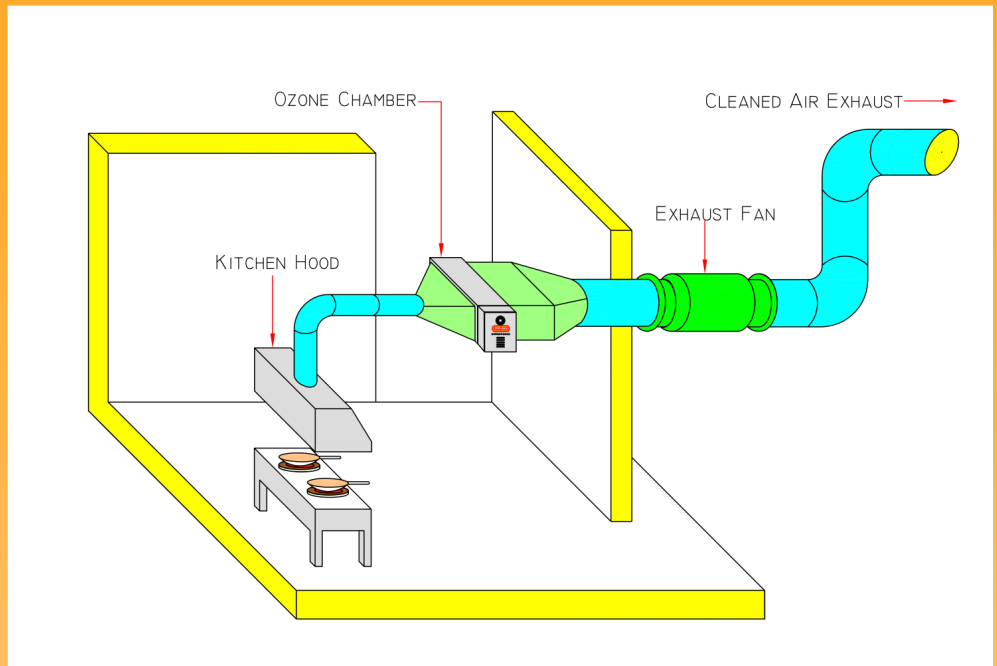

Features & Benefits

- Compact Design
- Quick and Easy Installation
- Easy Maintenance
- Reduces Duct Cleaning
- Operations Indicator LEDs
- No Pressure Drop
- Interlock Control Panel
- No Noise

Location / Placement

COS-5-90 and COS-10-90 units should be installed as near to the cooking hoods as possible, or as far as possible from the discharge outlet, so as to give the longest possible contact time with the cooking exhaust.

For optimum performance, the contact time for air treatment in the duct should be approximately 0.1 to 0.2 seconds or longer, if possible. Charcoal Filters may be installed at the last stage to mop up residue ozone



Airverclean Pte Ltd

61 Kaki Bukit Ave 1,
03-19, Shun Li Industrial Park
Singapore 417943.
Republic of Singapore.
Tel: 65-67415800, Fax: 65-67413935

Distributed by:

